



NOTES:

1. Do not scale.
2. All dimensions given in inches (mm).
3. For lock and strike preparation, see templates 7086-8003 (H.M.) and 7086-8004 (Wood Door, H.M. Frame).
4. Cylinder hole ONLY for: NTM610/612/613, NTM615/617/618, NTM620/622/623, NTM625/627/628
5. Thumbturn holes ONLY for: NTM615/617/618, NTM625/627/628, NTM635/637/638, NTM645/647/648
6. Door and Frame Provider is responsible for locating this product on the door to ensure it meets ADA height requirements.
7. Wire raceway required for hard power option. Raceway to connect $\varnothing 3/4"$ (19 mm) hole to hinge edge power source.



(*) Escutcheon & Trim Positions and Sizes

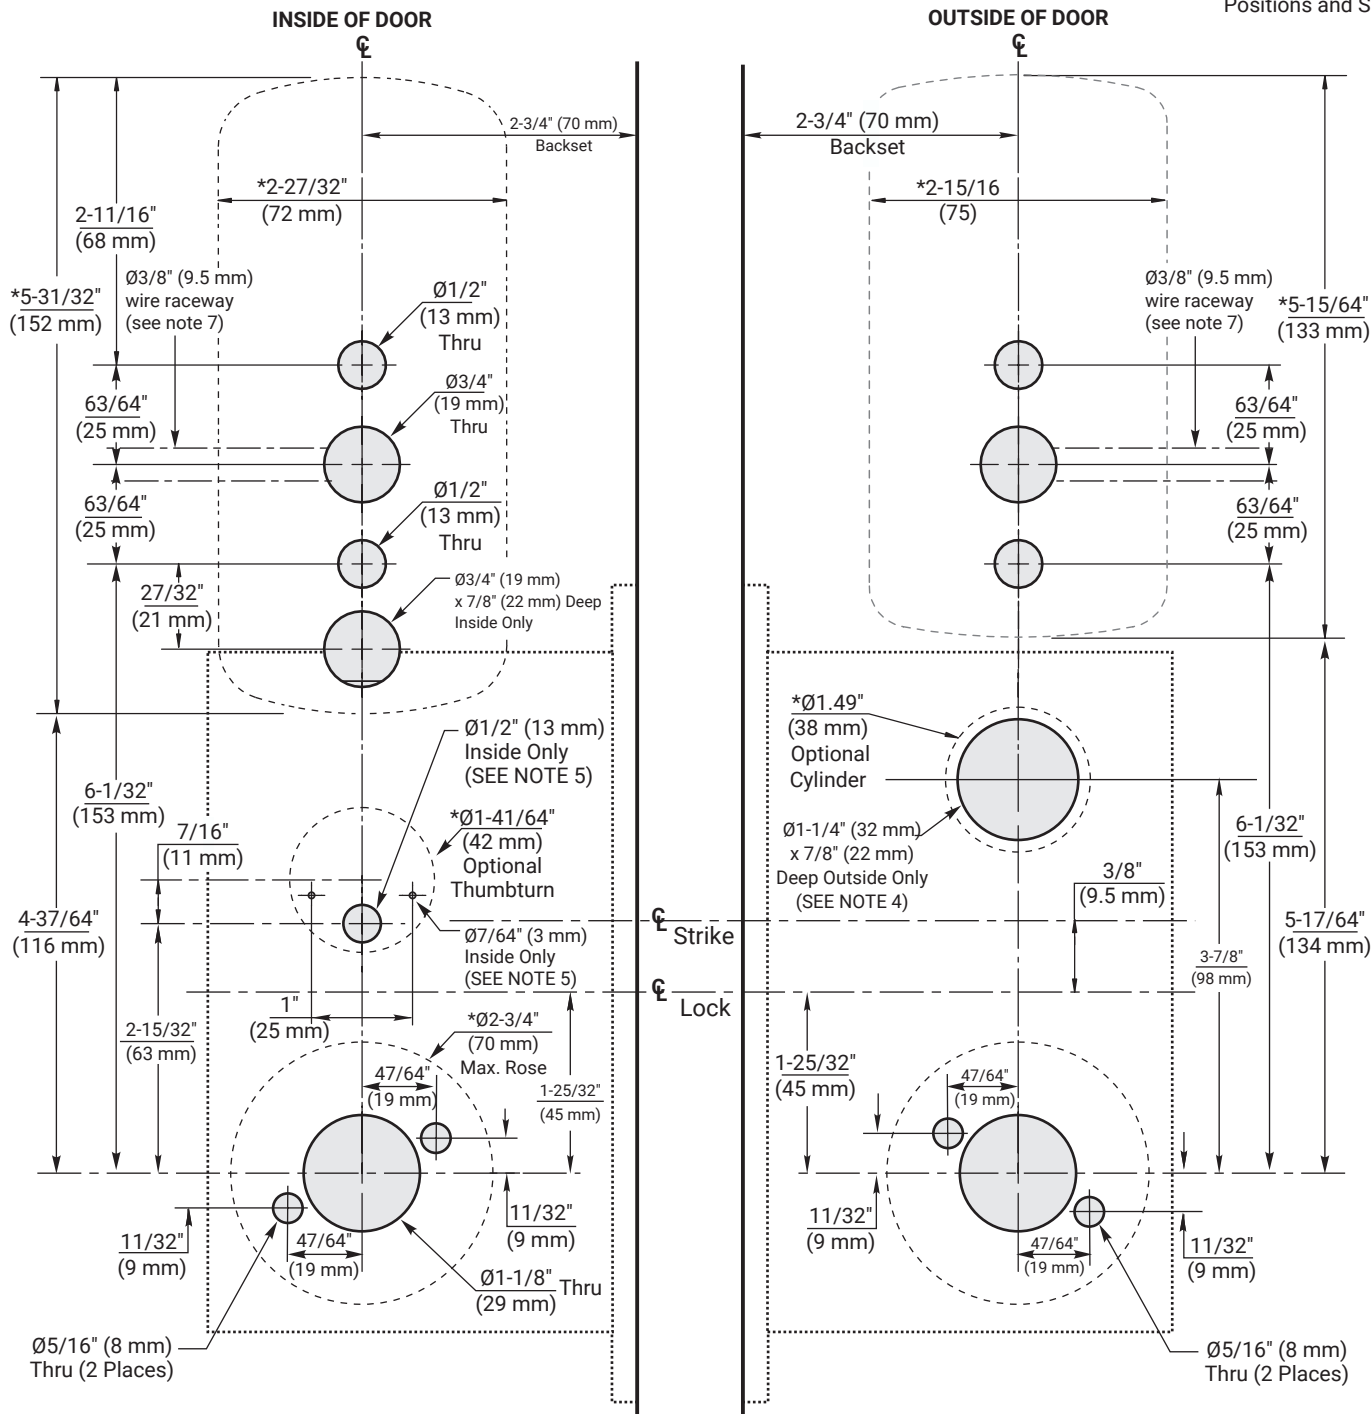

RESPONSIBILITY
 DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

nexTouch® Access Mortise Lock
 Wood and H.M. Door Preparation
 Thru Bolted Sectional Lever Trim
 800-810-9473
 www.accentra-assaabloy.com

ACCENTRA
ASSA ABLOY

Experience a safer
 and more open world

Copyright © 2022, 2023, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

SUPERSEDES 80-8420-1000-999 (02/23)	DO NOT SCALE DRAWING	
TEMPLATE NUMBER	SHEET	DATE
80-8420-1000-999	1 of 1	06/24