

## Rockwood LV-FL Fusible Link Fire Rated Louver

The global leader in  
door opening solutions

For Installation Assistance, Call Rockwood Products at 800-458-2424 • [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)


### INSTALLATION INSTRUCTIONS

#### Fire Rated\* LV-FL Door Louvers

1. Door cutout size must be the same as order size of louver.
2. The door cutout may require the use of reinforcement per door manufacturers' listing.
3. Position the fusible link on top. Install both the louver and auxiliary frames simultaneously using the #8 x 1" long screws furnished. The louver handle and screw heads should be on the inside of the door (opposite corridor side).
4. Tighten the Phillips head screws by hand. Power screwdrivers are not recommended. Note: Rockwood is not responsible for customer painted louvers, due to possible changes to operating condition.

**CAUTION. Fasteners should be tightened evenly all around, but not over tightened. It is recommended to tighten fasteners in alternating sequence to ensure balance.**

\* Used with hollow metal & composite type fire doors.

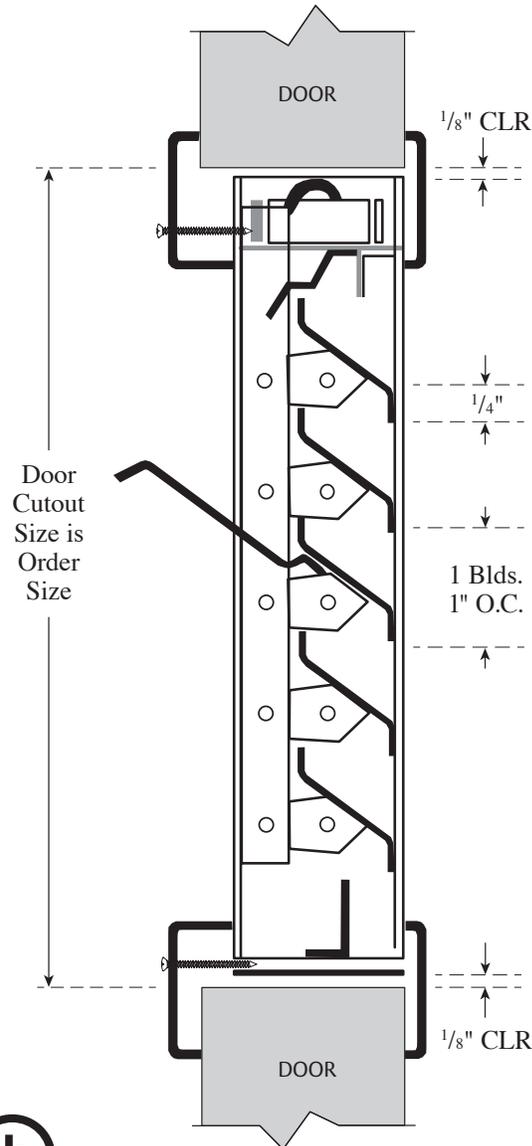

NOT TO SCALE